

FILTERING CELLS

METAL FILTERING CELLS
LABYRINTH ARRANGED

VLX

DATA SHEET:

C

VLX

2014

FEB

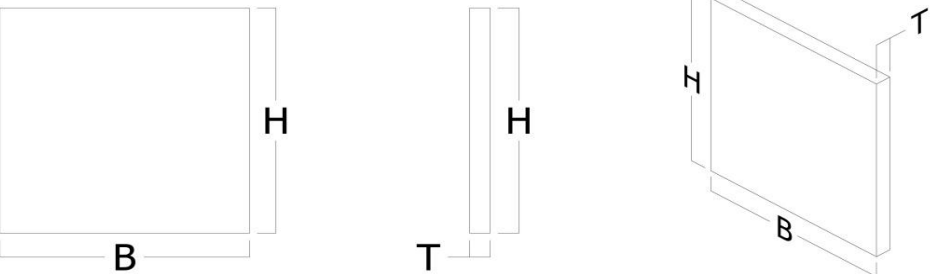
7



VLX

GENERALS

FULLY BUILT IN AISI 304 STAINLESS STEEL THEY CONSIST OF A FRAME WHICH INSIDE HOUSES "U"-SHAPED ELEMENTS THAT, PROPERLY ARRANGED, CREATE A SOLID LABYRINTH STRUCTURE. THEIR OPERATION IS BASED ON THE PRINCIPLE OF INERTIA. MAINLY USED FOR THE FILTRATION OF GREASY VAPOURS AND OILY MIST, THEY ARE WIDELY USED IN THE FOOD SECTOR AND IN THE HOOD FOR RESTAURANTS KITCHENS. THEY ARE EASILY WASHABLE, EVEN IN THE DISHWASHER; AND HAVE AN UNLIMITED SERVICE LIFE.

FRAME	INOX AISI 304
SHAPED INTERNAL ELEMENTS	INOX AISI 304
INITIAL PRESSURE DROP (at 0,5 m/s)	55 Pa
MAXIMUM OPERATING TEMPERATURE	300°C
MAXIMUM RELATIVE HUMIDITY	100%
LEGEND OF DIMENSIONS	<div><div><div>H</div><div>B</div><div>T</div></div><div><div>HEIGHT</div><div>BASE</div><div>CELL THICKNESS</div></div></div> <div><div></div><div>Reference drawing: vefim_vlx</div></div>

PRODUCT CODE		PRICE (€)	DIMENSIONS (mm)			No OF PIECES FOR BOX
			H	B	T	
VLX404025		a.r.	400	400	25	20
VLX405025		a.r.	400	500		
VLX502525		a.r.	500	250		
VLX504025		a.r.	500	400		
VLX505025		a.r.	500	500		
VLX404034		a.r.	400	400	34	10
VLX405034		a.r.	400	500		
VLX502534		a.r.	500	250		
VLX504034		a.r.	500	400		
VLX505034		a.r.	500	500		

● Material normally in stock

DIFFERENT DIMENSIONS OR VERSIONS ARE AVAILABLE ON REQUEST	
ACCESSORIES ON REQUEST	STAINLESS STEEL KNOBS ON REQUEST
	STAINLESS STEEL HANDLE FLAP ON REQUEST
	PNEUMATICALLY-OPERATED HANDLE ON REQUEST
	STAINLESS STEEL THREADED INSERTS

Vefim S.r.l. reserves the right to update without notice the characteristics described above.
This document may not be reproduced, transcribed, or translated (in part or in full) without specific written permission by Vefim S.r.l as provided for by law.