

FILTERING CELLS

DATA SHEET: C ACZP 2014 FEB 10

CELLS WITH CARDBOARD FRAME
PUNCHED WITH PLEATED SEPTUM

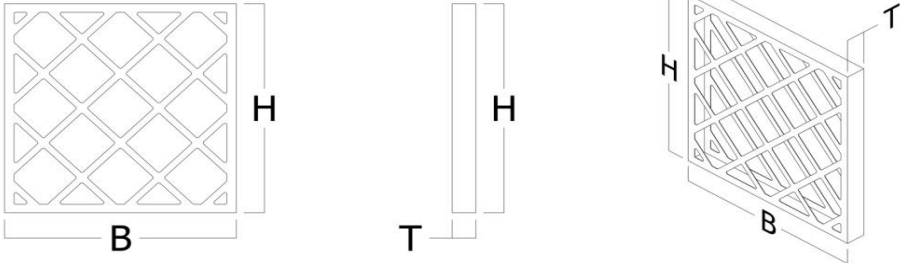
ACZP



ACZP

GENERALS

FILTERING CELLS TO MISS IN CARDBOARD FULLY STAMPED A MICROWAVE FORMING ONE STRONG FRAME.

FRAME	CARTONE E/KBMT/242
PROTECTIVE MESH	CARTONE E/KBMT/242
FILTERING SEPTUM	PLEATED POLYESTERE
EFFICIENCY CLASS CEN EN 779	G4
EUROVENT CLASS	EU 4
ARRESTANCE ASHRAE 52.1.1992 Am	90,00%
INITIAL PRESSURE DROP (at 0,5 m/s)	50 Pa
RECOMMENDED FINAL PRESSURE DROP	250 Pa
MAXIMUM OPERATING TEMPERATURE	80°C
MAXIMUM RELATIVE HUMIDITY	100%
LEGEND OF DIMENSIONS H B T HEIGHT BASE CELL THICKNESS	 Reference drawing: vefim_celle_cartone

PRODUCT CODE		PRICE (€)	DIMENSIONS (mm)			No OF PIECES FOR BOX	FILTERING SURFACE (m²)	AIR FLOW (Nm³/h)	No OF PLEATS
H	B		H	B	T				
ACZP285948	•	a.r.	287	592	48	16	0,98	1.760	17
ACZP405048	•	a.r.	400	500		20	1,00	1.800	21
ACZP505048	•	a.r.	500	500		20	1,26	2.150	26
ACZP595948	•	a.r.	592	592		8	1,90	3.400	33

• Material normally in stock

DIFFERENT DIMENSIONS OR VERSIONS ARE AVAILABLE ON REQUEST

Vefim S.r.l. reserves the right to update without notice the characteristics described above.
This document may not be reproduced, transcribed, or translated (in part or in full) without specific written permission by Vefim S.r.l as provided for by law.